


NO.	Revision history	Date	Signed	Checked	Approved
A					



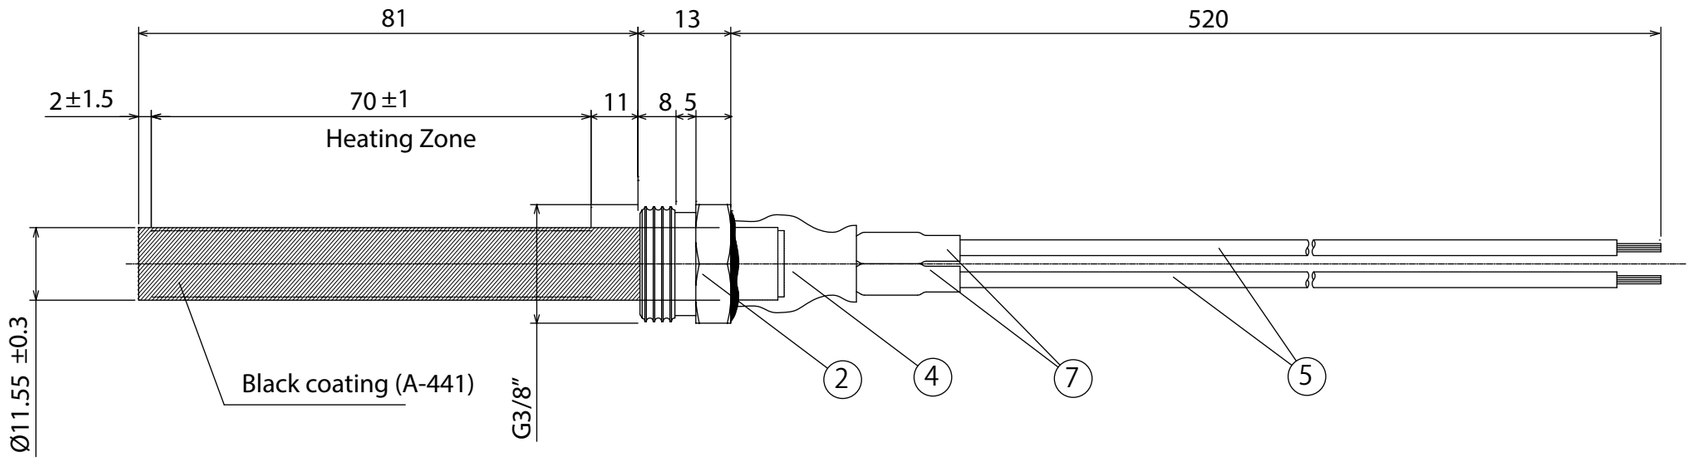

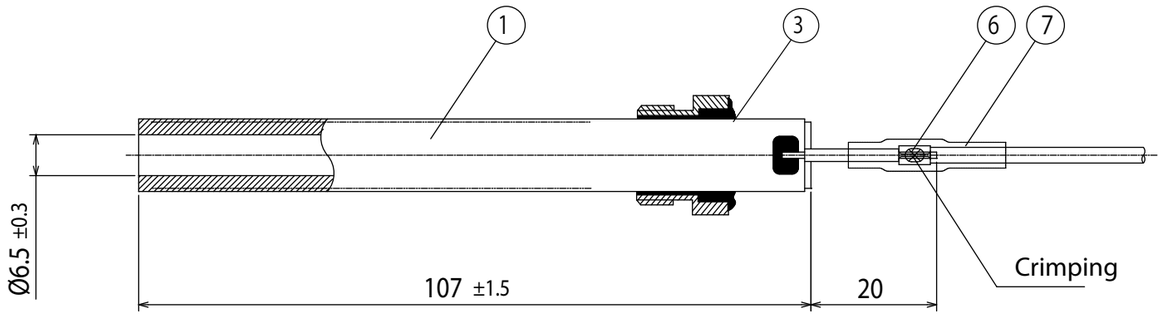

Basic specifications

Forward Current	AC240 ±4% AC230 ±6% AC220 ±10%
Power consumption	345 W (240V) 315 W (230V) 285 W (220V)
]Normal resistance	33.5~49.13Ω
Specified temperature	870~1100°C.
Rising time	1000°C within 60s.

Parts list

No.	PART NAME	PCS.	DRAWING No.	MATERIAL	OTHER
7	HEAT SHRINKABLE TUBE	2	∅4×25 L	SILICONE	180℃
6	CRIMP CONNECTOR	2	29071-1	Cu/Tin PLATING	
5	LEAD WIRE	2	05sq, WHITE	SILICONE-GLASS	180℃
4	HEAT SHRINKABLE TUBE	1		SILICONE	180℃
3	CERAMIC SEALING			FUJICERAM-FC	FKK
2	MOUNTING	1		G3/8", BRASS	
1	HEATING ELEMENT	1		ALUMINA 92%	220~240V

Statements

1. Without specific notice the ceramic element dimension tolerance shall be ±0.5mm
2. Normal operating condition definition (temperature and humidity) Temperature: 15〜35 ℃ / Humidity : 25〜80% Pressure : 86〜106KPa
3.This product comply with RoHS standard.
4. For further technical information and condition of use please refer at the related data-sheet or consult your FKK sales representatives or distributors.

NAME	**PSx-6-240-B**				THIRD ANGLE PROJECTION
FKK Standard Pellet System Heater					SCALE 1 : 1
MATERIAL			DATE 2013.11.01		CODE
APPROVED	CHECKED	CHARGED	DESIGNED	DRAWN	DRAWING No.
				Toyokawa	**IBA-HH008**

Proprietary statement The drawing as well as the content of the present specification data are the proprietary of FKK Corporation. In case of non-respect of the present term, FKK may take action and ask for damages.

FKK Corporation **FKK PLUG ®**