

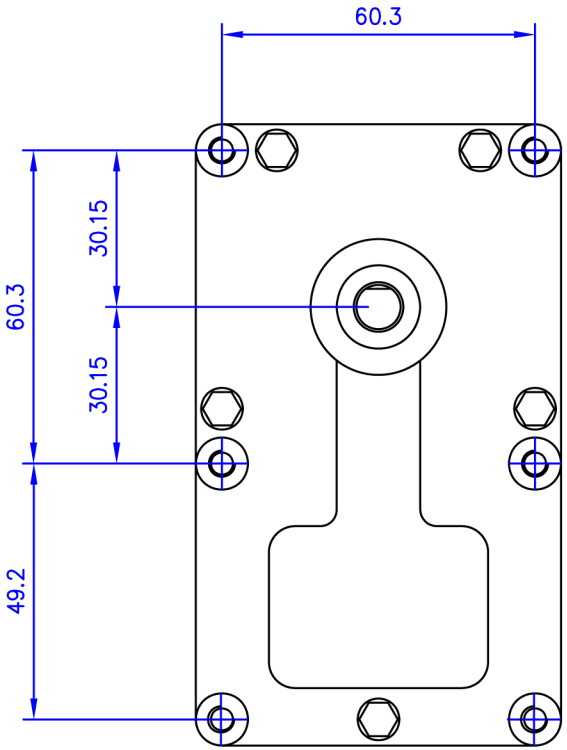



MOUNTING HOLES
TAPPED M5
6 POSITIONS

| APPROVED | |
|---|---|
| SIGNATURE | DATE |
| | |

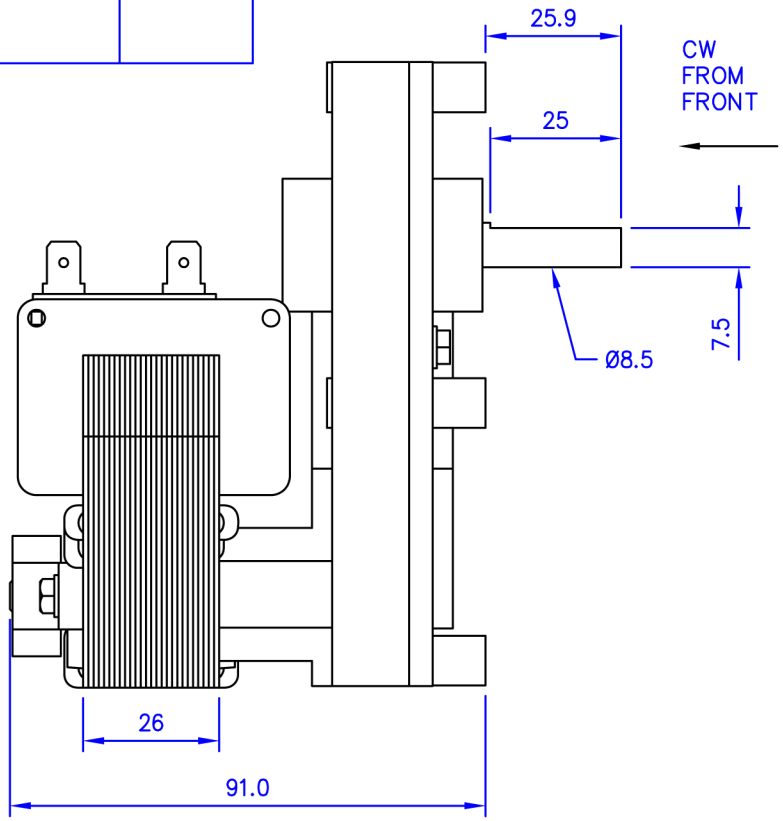


HELICAL INPUT
DELRIN SHAFT 2 WHEEL
NOISE REDUCING GREASE
BALL RACE BEARINGS ON MOTOR

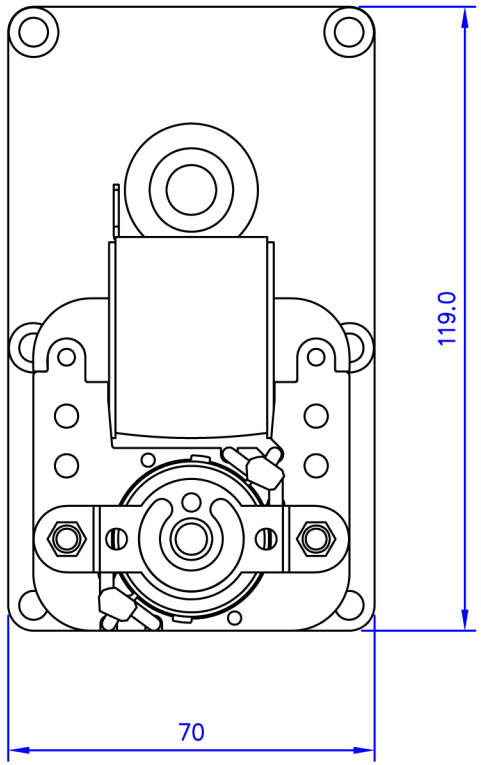


## MOTOR SPEC

MEM 510 (230v 50Hz)
1.00" BOBBIN (NYLON – GLASS FILLED CLASS F)
SOLDERABLE POLYURETHANE WIRE (CLASS H, UL APPROVED)
125°C SELF RESETTING THERMOSTAT FITTED (UL APPROVED)
6.35mm MALE TAGS FITTED
COVER WITH GLASS CLOTH TAPE (CLASS F)
GEARBOX TO RUN CLOCKWISE WHEN VIEWED FROM THE FRONT

## TECHNICAL DATA

INPUT POWER @ 230v 50Hz – 17WATTS
NOMINAL CURRENT @ 230v 50Hz – 0.15Amps
STALLED CURRENT @ 230v 50Hz – 0.22Amps
OUTPUT TORQUE @ 230v 50Hz – 23Nm

| | | | | | |
|---|---|---|---|---|---|
| MELLOR ELECTRICS Ltd | APPROVED | – | – | CUSTOMER | |
| BLACKBURN ENGLAND | DRAWN | LC | 29/07/11 | DESCRIPTION T3 SC9–100 2.0RPM 230v 50Hz | PART No |