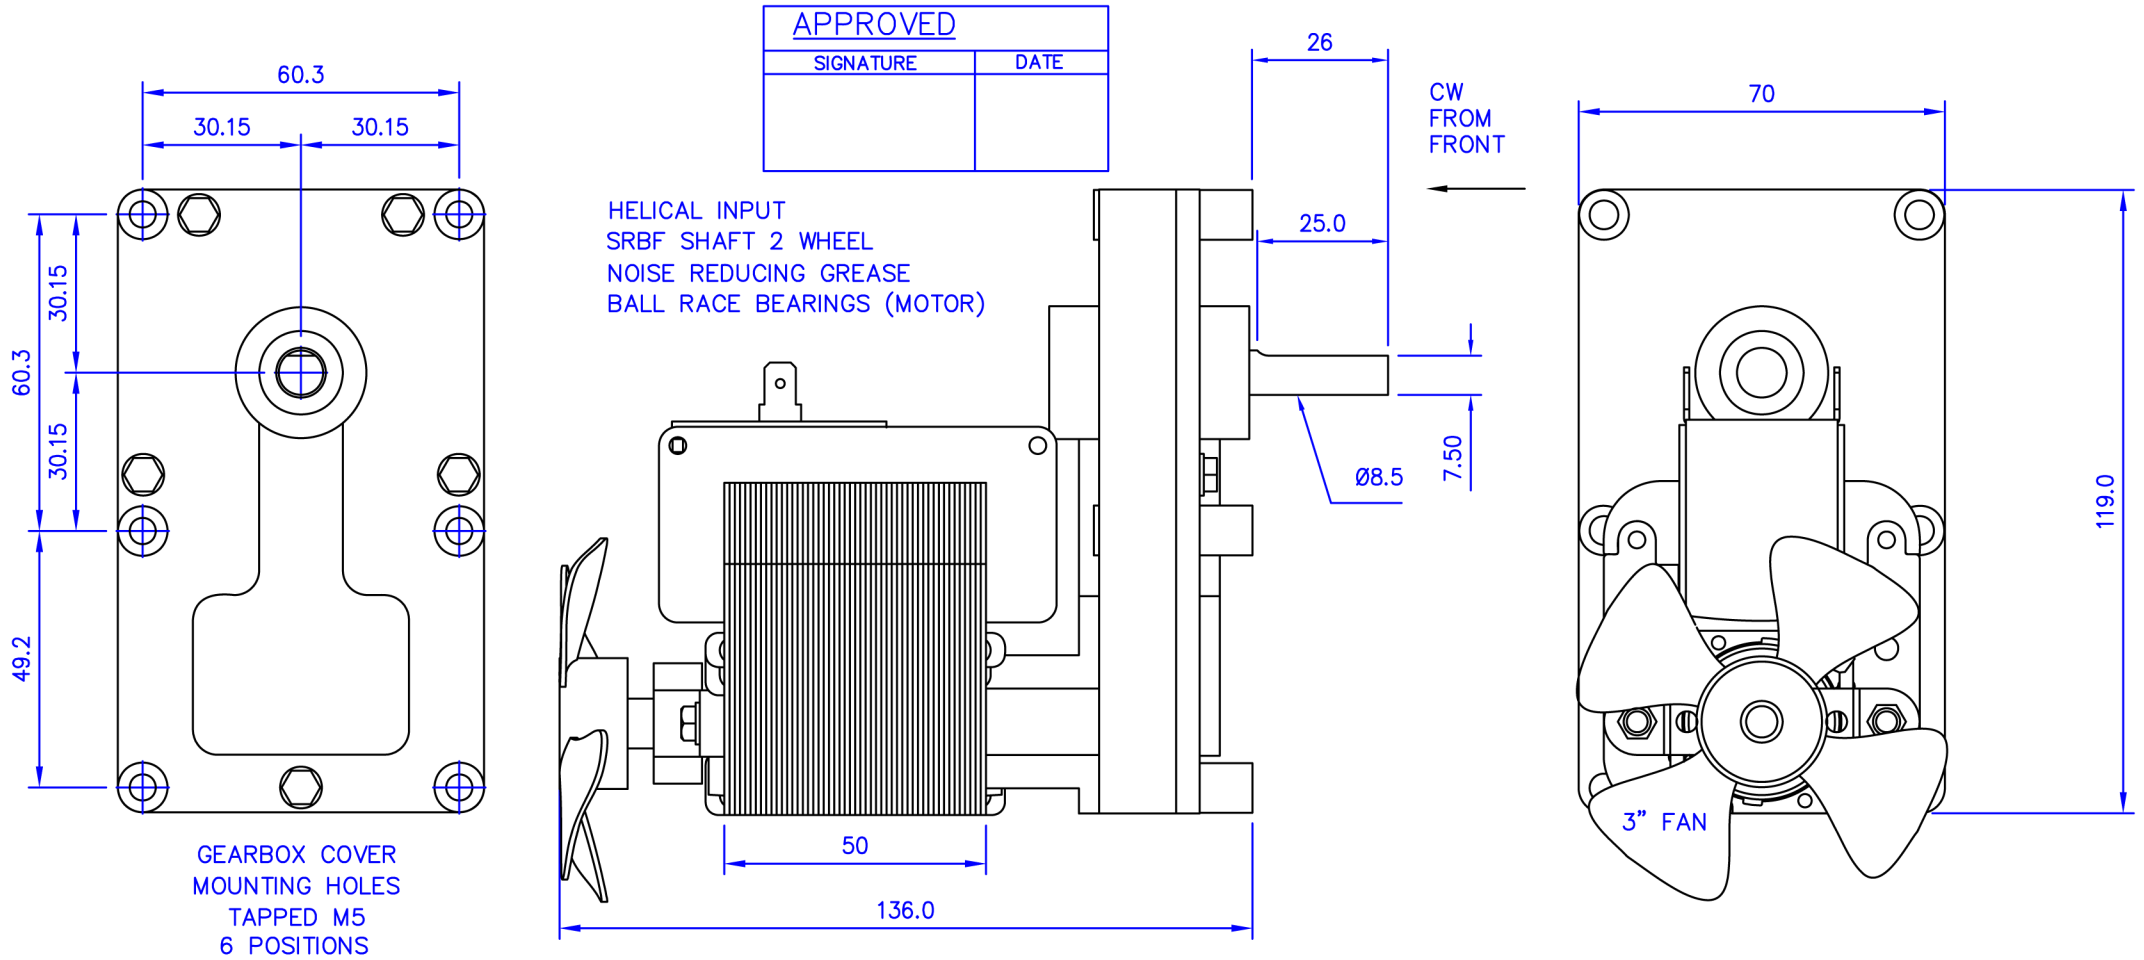


MOTOR SPEC

MEM 474 (230v 50Hz)
2.00" BOBBIN (NYLON – GLASS FILLED CLASS F)
SOLDERABLE POLYURETHANE WIRE (CLASS H, UL APPROVED)
125°C SELF RE-SETTING THERMOSTAT (UL APPROVED)
6.35mm MALE TAGS FITTED
COVER WITH GLASS CLOTH TAPE (CLASS F)

TECHNICAL DATA

INPUT POWER @ 230v 50Hz – 56WATTS
NOMINAL CURRENT @ 230v 50Hz – 0.55Amps
STALLED CURRENT @ 230v 50Hz – 0.84Amps
OUTPUT TORQUE @ 230v 50Hz – 12Nm

MELLOR ELECTRICS Ltd BLACKBURN ENGLAND	APPROVED	–	–	CUSTOMER	
	DRAWN	LC	08/07/14	DESCRIPTION T3 SC9-200 16 RPM 230v 50Hz	PART No