


APPROVED	
SIGNATURE	DATE

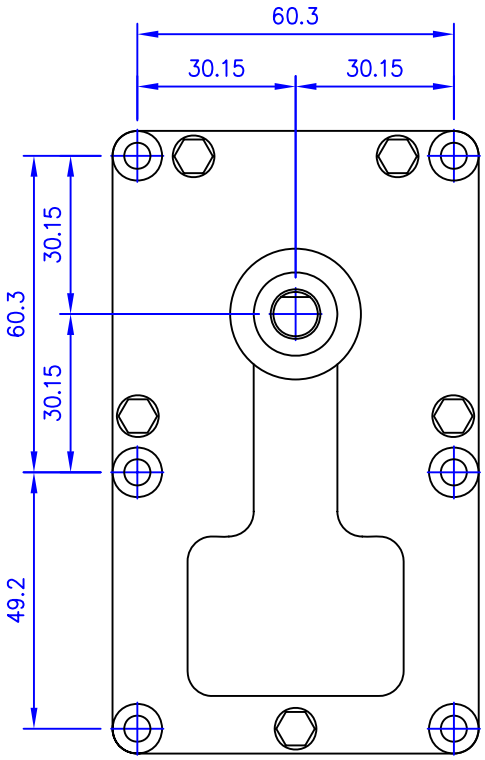

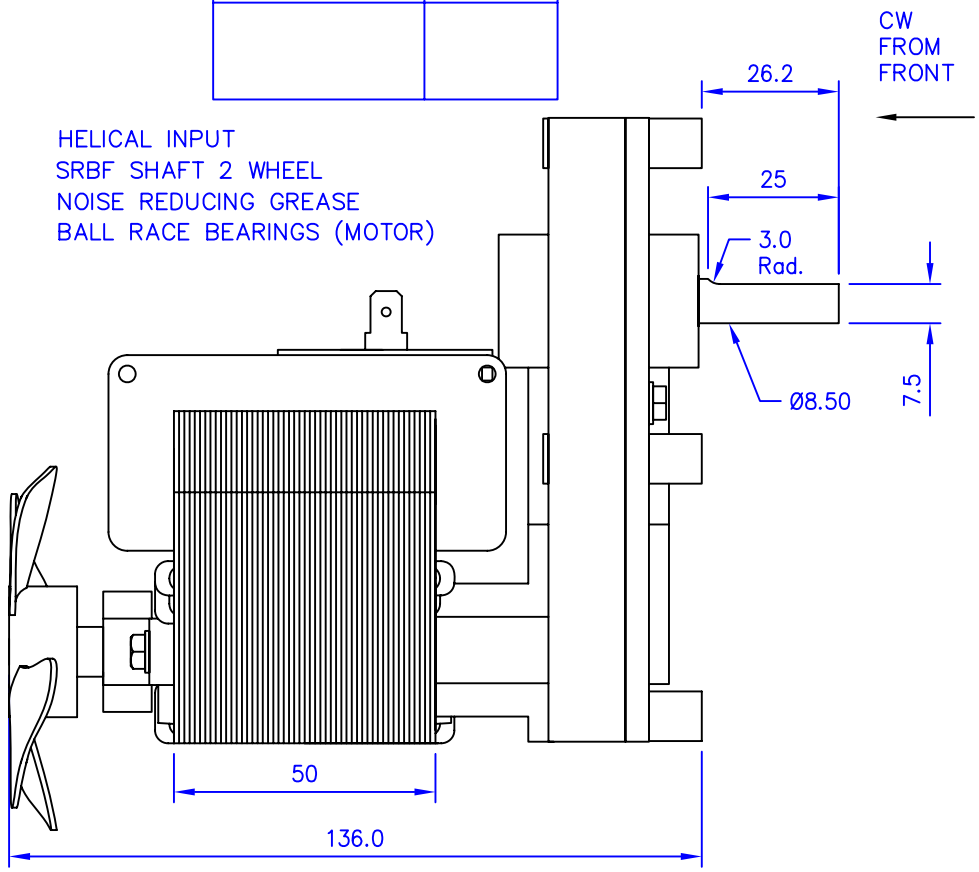

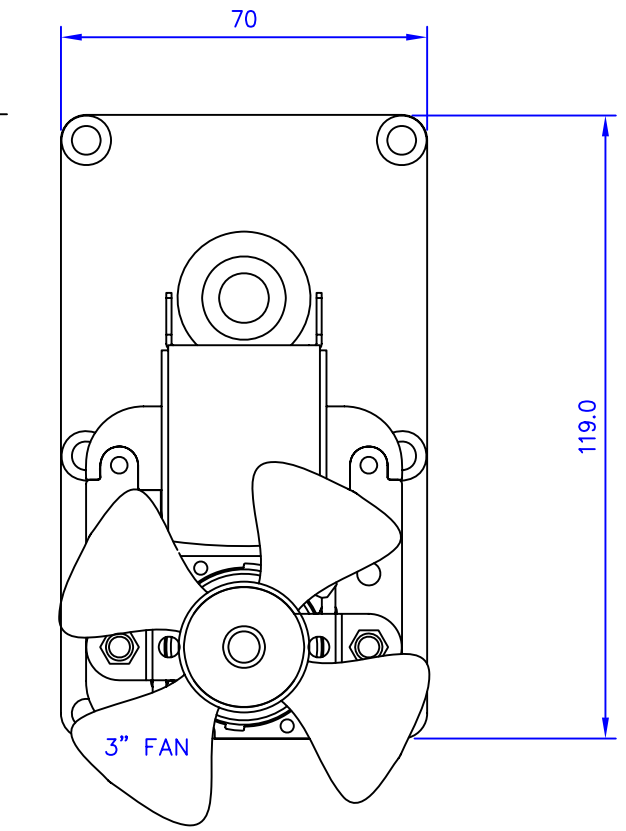

MOTOR SPEC

MEM 497 (230v 50Hz)
2.00" BOBBIN (NYLON – GLASS FILLED CLASS F)
SOLDERABLE POLYURETHANE WIRE (CLASS H, UL APPROVED)
125°C SELF RE–SETTING THERMOSTAT (UL APPROVED)
6.35mm MALE TAGS FITTED
COVER WITH GLASS CLOTH TAPE (CLASS F)

TECHNICAL DATA

INPUT POWER @ 230v 50Hz – 52WATTS
NOMINAL CURRENT @ 230v 50Hz – 0.48Amps
STALLED CURRENT @ 230v 50Hz – 0.73Amps
OUTPUT TORQUE @ 230v 50Hz – 20Nm

MELLOR ELECTRICS Ltd	APPROVED	–	–	CUSTOMER	SOFTING ITALIA	
BLACKBURN ENGLAND	DRAWN	LC	26/03/15	DESCRIPTION	T3 8rpm 230v 50Hz	PART No FB1304